



Machines

Vibratory Rammers 62 – 83 kg
ACR 60 / ACR 68 / ACR 70 D

www.ammann-group.com



Full power with operator's comfort in mind





Three machines for universal application

Universal machines

The Ammann range of rammers offers the highest performance, operator's comfort, economic viability, ergonomic design and useful optional equipment and therefore the optimal compaction machine for every construction application. The rammers can be operated under the toughest conditions in trench compaction work, back filling or in patch work on roads – even in the most confined areas.

Three strong characters

The Ammann rammers ACR 60 and ACR 68 have been developed in accordance with the newest ergonomic and environmental requirements. They are both powered by a Honda GX 100 4-stroke petrol engine with automatic oil alert system (including a well-visible LED-warning lamp) and with a carburetor with integrated pump which assures a better fuel injection leading to an always optimal engine start up.

The engine assures low emissions values meeting the US-EPA Tier III exhaust norms (impor-

tant aspect for applications in confined areas with low air circulation). Furthermore it is resistant against dirty fuel and protected from damage by a solid metal casing.

The high compaction performance combined with an extraordinary fast forward motion, the operating weights with exactly 62 kilos resp. 68 kilos and the extreme low center of gravity, due to the low mounted engine and the downward distribution of the mass make both machines very robust and reliable products.

A height-adjustable, vibration reducing handle and a fuel reservoir with extended volume of 3 litres lead to a fatigue free operation for longer periods.

Various sizes of shoe widths from 165 mm up to 400 mm assure a wide range of applications.

These new rammers contain many new and useful options:


- The machine height has been reduced by approx. 10 cm due to a special adapter plate (for the operation in back fills, especially when using extremely narrow shoes)
- Cyclone pre cleaner for the air filter (gives up to five times longer service intervals)
- Air filter service indicator
- Operation hour meter with engine speed indicator and reminder for oil change




The range of Ammann rammers is completed by the robust and strong model ACR 70 D powered by a Yanmar diesel engine and an operating weight of 83 kilos. As usual with your heavy duty construction machinery this rammer consumes diesel fuel so that just one type of fuel has to be made available on the job site.




Highest flexibility in operation

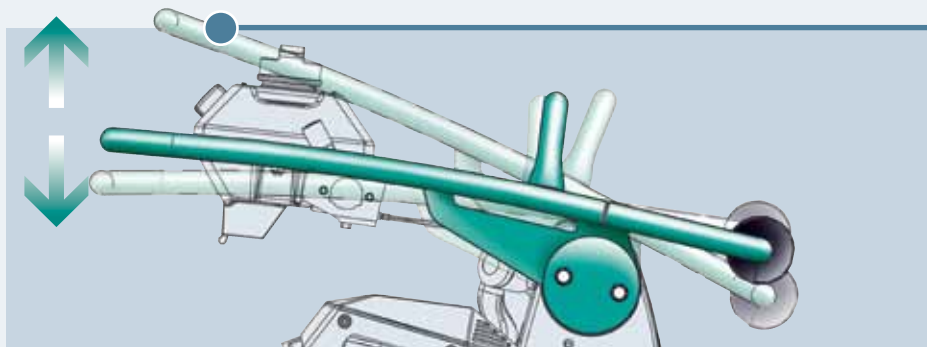


Optimal ergonomics thanks to height-adjustable guiding handle

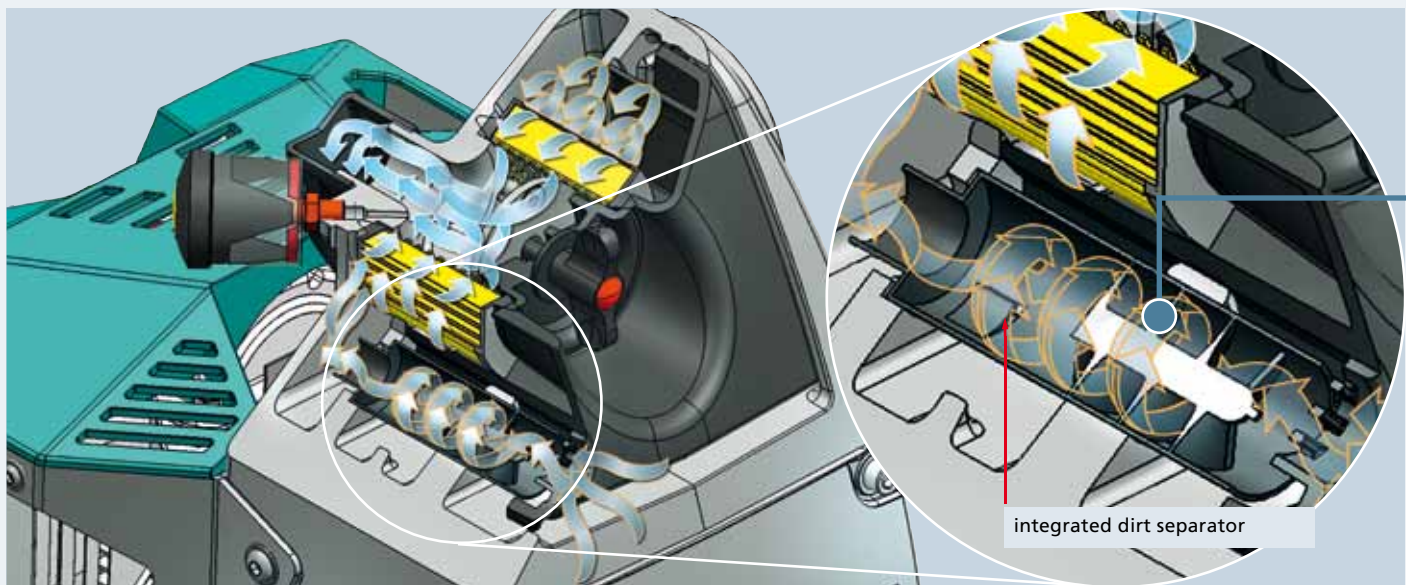

Voluminous but finely woven air filter with self-cleaning effect optionally equipped with a cyclone pre cleaner and a service indicator (gives up to five times longer service intervals)

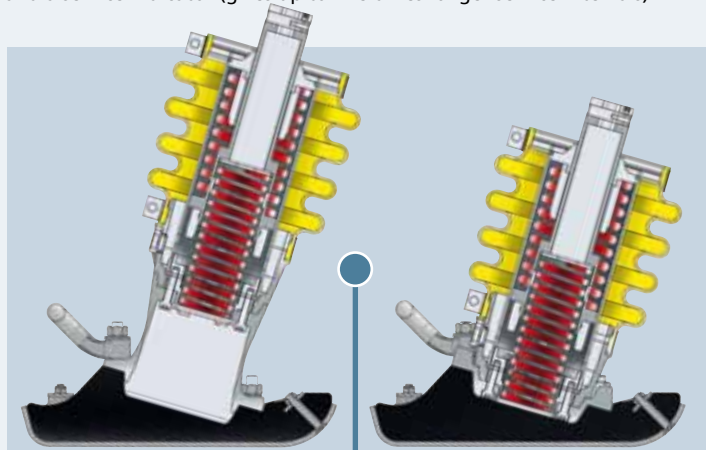

Option: reduction of machine height by approx. 10 cm by a special adapter plate

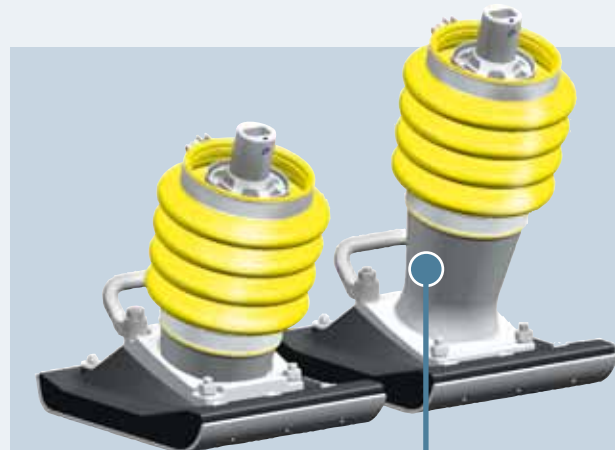

Option: reduction of machine height



More efficiency thanks to newest technology

High manoeuvrability in confined areas thanks to short guiding handle		Fuel reservoir with extended volume and integrated filter
Operator's comfort: sure-grip and vibration isolated guiding handle		Convenient transport device with centering
Modern carburetor with integrated accelerator pump for trouble-free quick engine start		Hourmeter with engine speed indicator
Solid engine protection casing		Additional rolls for easy loading and unloading
Standard engine equipment: automatic oil alert system with LED warning lamp		Improved forward motion thanks to lower center of gravity and fine tuned machine design
Additional handle for easy transport and loading		Robust gear box housing
Tamper shoe made of high quality synthetic material with integrated steel plate – option: Wear and tear steel plate protection on both sides		Innovative spring assembly for a compact design of the spring leg

Several useful standard components

Best in class thanks to an extraordinary fast forward motion
due to the extreme low center of gravity

Patented height reduction of approximately 10 cm
using an adapter plate (option)

Patented height reduction of approximately 10 cm

Standard height

Extension

310 mm asymmetric:
compaction work in trenches
protected by shuttering systems
without inclining the rammer
during operation

340 mm asymmetric

165 mm

200 mm

230 mm

280 mm (Standard)

330 mm

400 mm

280 mm option:
Wear and tear steel plate protection
on both sides



Technical Data

	ACR 60		ACR 68	ACR 70 D	
	petrol		petrol	diesel	
Working width	mm (in)	280 (11)	280 (11)	280 (11)	
Operating weight	kg (lb)	62 (137)	68 (150)	83 (183)	
Engine / Type		Honda GX 100	Honda GX 100	Yanmar L 48 AE	
Engine output	HP (kW)	3 (2,2)	3 (2,2)	4,4 (3,2)	
at rpm	1/min. (rpm)	4300	4300	3250	
Percussion rate	blows / min. (bpm)	680	680	730	
Stroke	mm (in)	65 (2,6)	65 (2,6)	60 (2,4)	
Centrifugal force	kN (lbf)	11,5 (2,6)	13 (2,9)	14 (3,1)	
Surface capacity	m²/h (ft²/hr)	225 (2422)	225 (2422)	210 (2260)	
Fuel tank capacity	l (gal)	3,5 (0,8)	3,5 (0,8)	3 (0,7)	
Travel speed	m/min (mph)	13,5 (0,5)	3,5 (0,5)	13 (0,5)	
max. compaction performance*	cm (in)	45 (18)	50 (20)	60 (23,6)	
optional foot sizes width	mm	165-200-230-330-400		230-260-330-400	
	(in)	(6,5-7,87-9,1-13-16)		(9,1-10-13-16)	
Dimensions	A	B	C	D	E
ACR 60	mm 340	280	710	1020-1120	355
ACR 68	mm 340	280	710	1020-1120	355
ADS 70	mm 340	280	780	950	365

*depending on ground conditions

Specifications are subject to change due to technical improvements.

