


CRANE 12.13,5 - EXPORT

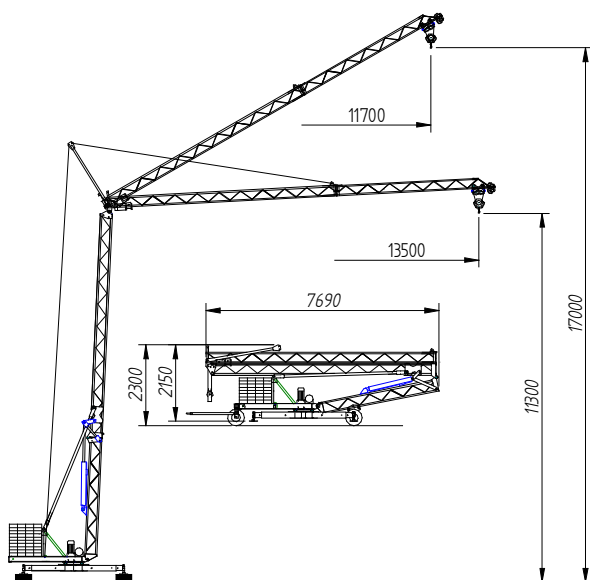

POWER MOTOR (220 V)

Hoisting	2,0 CV	single-phase
Slewing	0,5 CV	three-phase
Trolley	0,5 CV	single-phase
Hydraulic	0,75CV	single-phase

SAFETY DEVICES

OC Max. Load
OC Moment
OC hook (up/down)


PRICIPAL CHARACTERISTICS

HORIZONTAL JIB

INCLINATION JIB 30°

- Tensión (single-phase)	220 V	
- Power	2000 w	
- Height under jib/hook	12 / 11,3 m	18 / 17 m
- Jib reach	13,5 m	11,7 m
- Max. load at 8 m	450 Kg	
- Max. load at 13,5 m	250 Kg	
- Reach with max. load	8 m	
- Counterweight	2.370 Kgrs	
- Crane weight	1.435 Kgrs	
- Lenght between screws	2,5 m	
- Erecting hydraulic		

Load diagrams

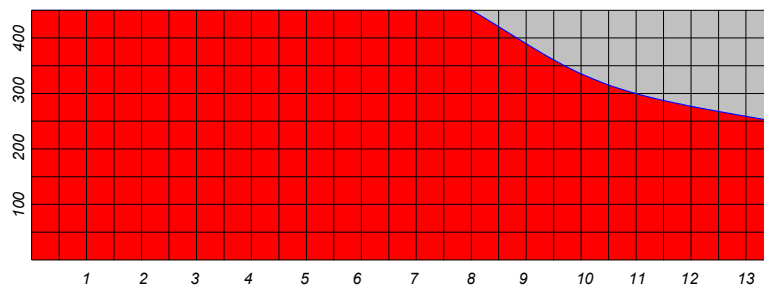

Hook reach (m)	8	9	10	11	12	13	13,5
Max. load (Kg)	450	390	335	300	275	260	250